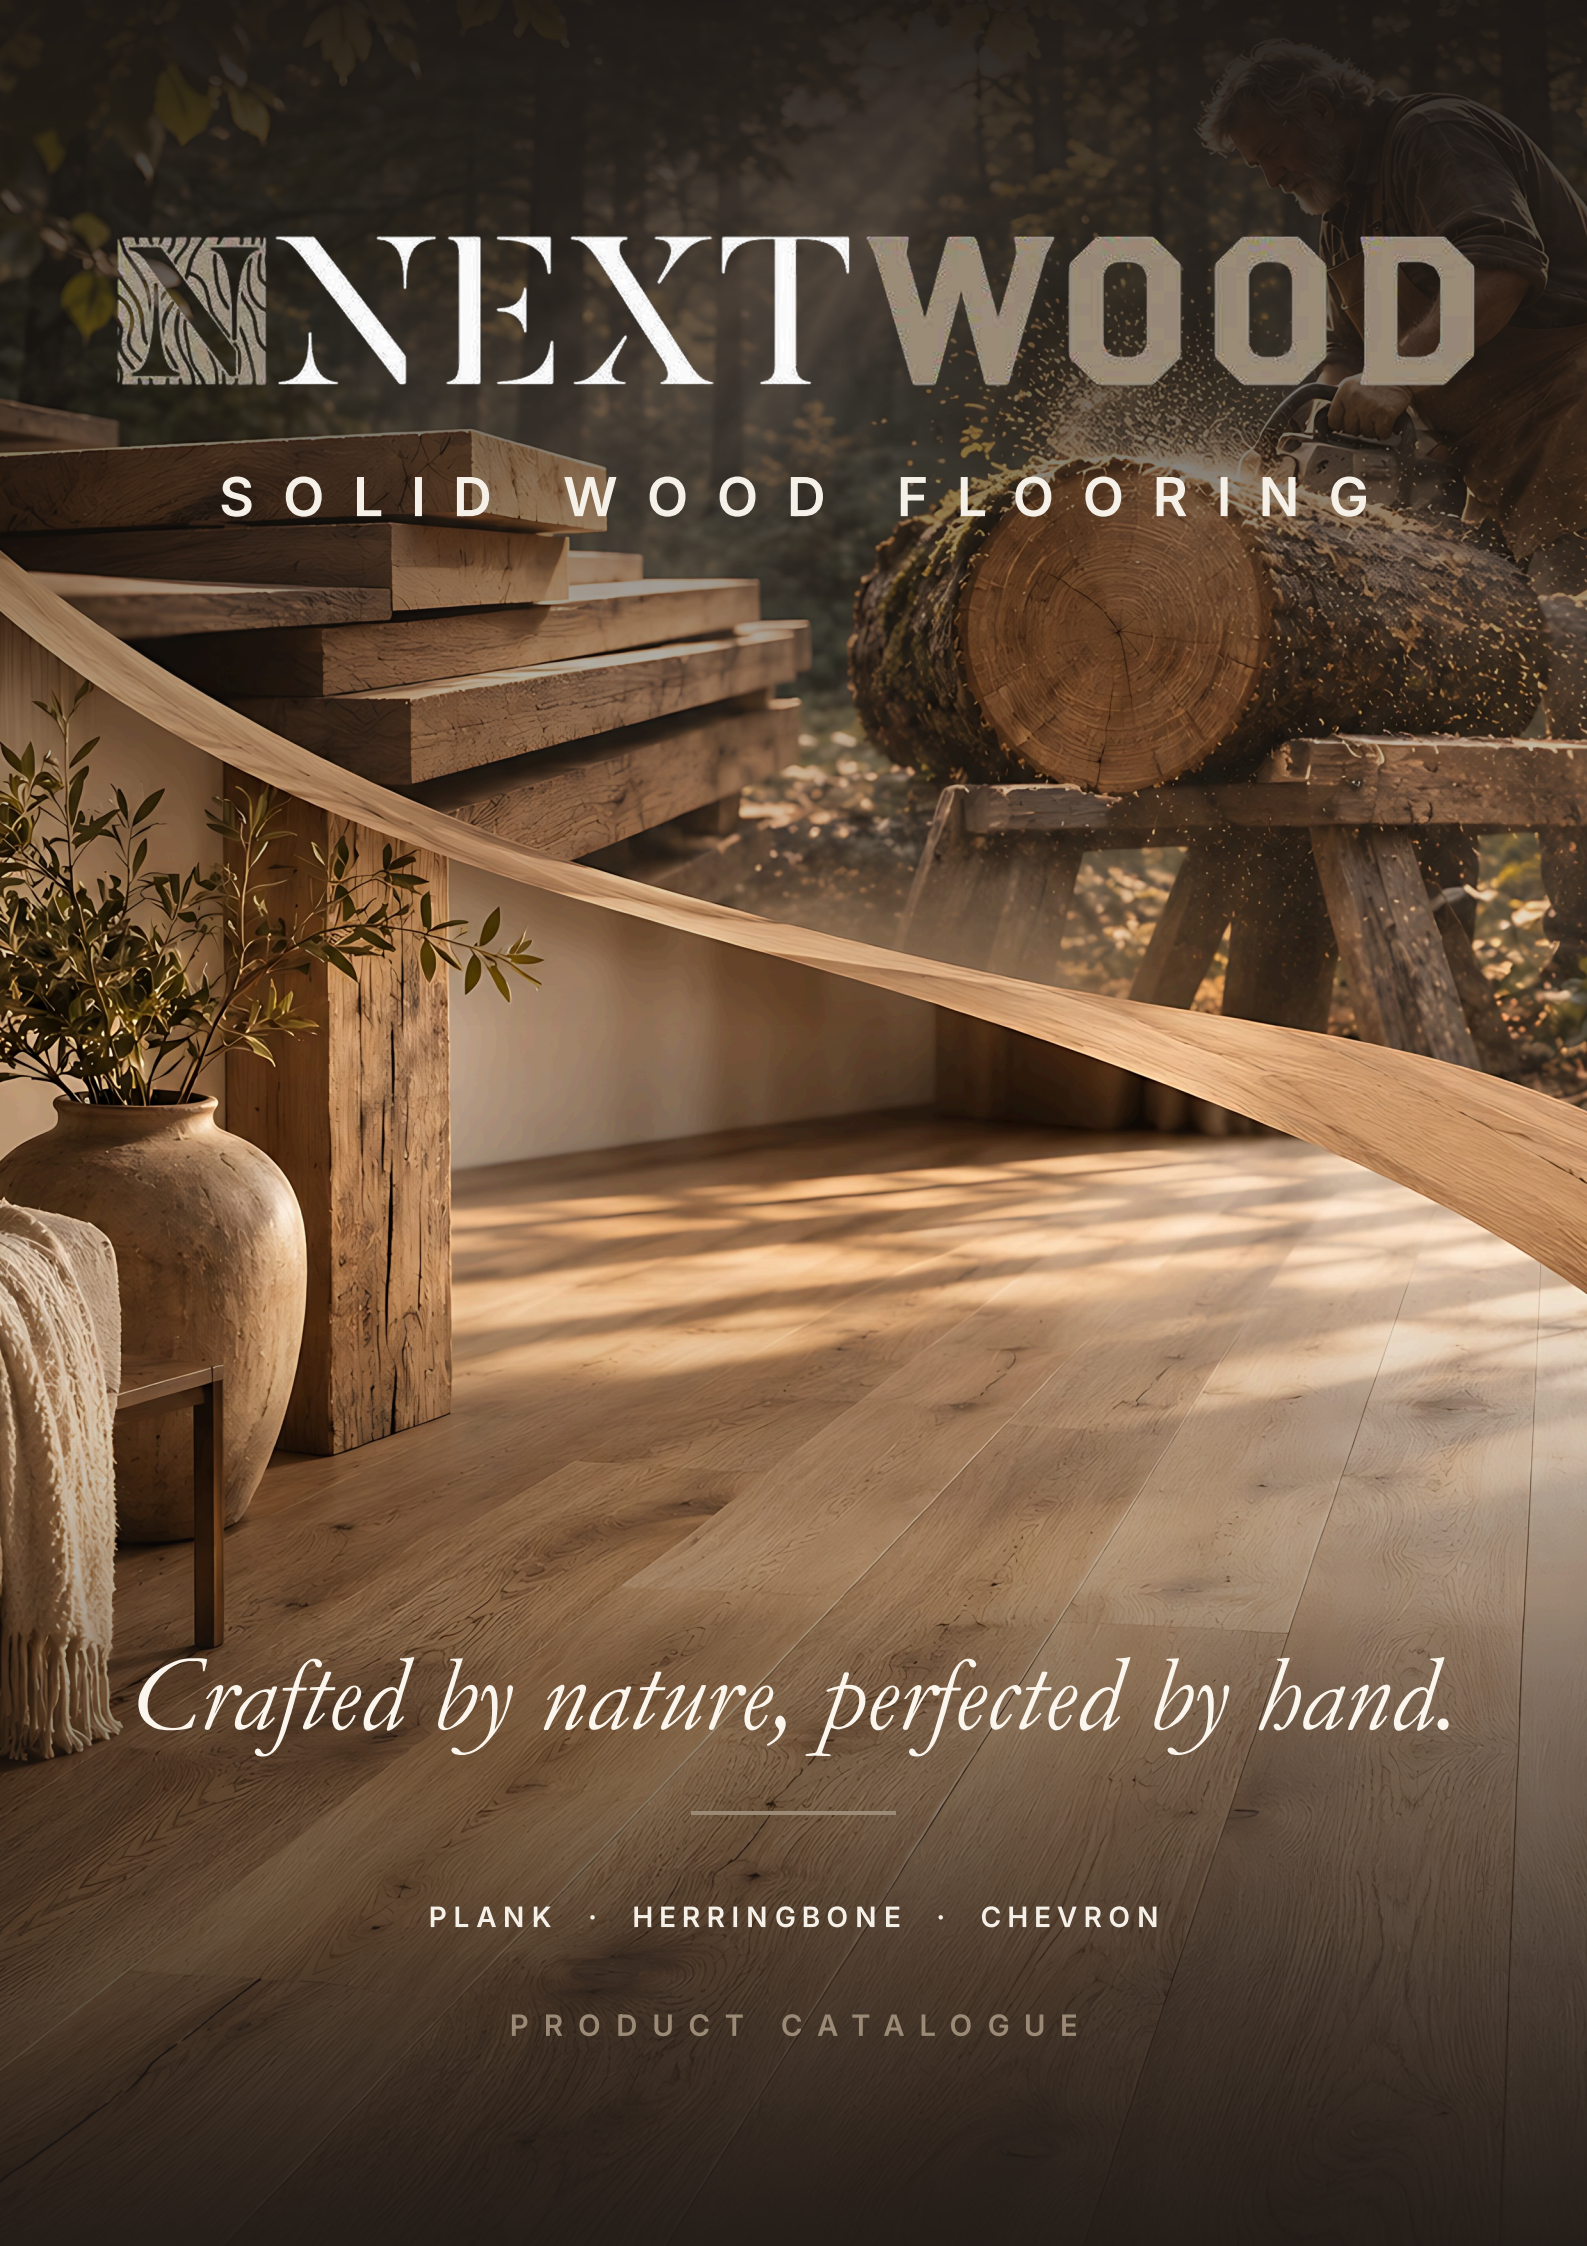


# NEXTWOOD

## SOLID WOOD FLOORING

*Crafted by nature, perfected by hand.*

PLANK · HERRINGBONE · CHEVRON

PRODUCT CATALOGUE

# Solid Wood Flooring

*One piece of oak, through its full thickness.*

## WHAT IT IS

Solid wood flooring is made from boards cut out of a single piece of hardwood - in our case European oak - through their full thickness. There is no plywood core and no thin veneer on top: what you see on the surface is the same wood all the way down.

## WHY SOLID WOOD

A solid floor can be sanded and renewed many times over its life, so it is not replaced but refreshed. It brings natural warmth and quiet to a room, regulates indoor humidity, and keeps its value for decades. Every board is different, because every tree is.

## NATURAL OIL FINISH

Our boards are finished with plant-based natural oil. The oil soaks into the wood instead of forming a plastic film on top, so the floor keeps the true look and feel of the grain. Everyday marks can be repaired spot by spot, without sanding the whole room.

## SURFACES AND GRADES

Choose a flat surface, a brushed surface that lifts the soft grain for a tactile, matte look, or a saw-cut surface for a rustic, hand-worked feel. Rustic grade shows lively knots and character; AB grade is calmer, with a clean and even appearance.

## LAYING PATTERNS

The same boards can be laid as long planks, as classic herringbone blocks or as a 45-degree chevron - from quiet, open spaces to elegant, traditional rooms.

# Solid Wood Parquet

*One piece of oak, through its full thickness.*

Solid parquet is cut from a single piece of European oak. It can be sanded and refinished many times over its life, adds natural warmth and sound comfort to a room, and keeps its value for decades. Every board is finished with plant-based natural oil, which soaks into the wood instead of forming a film, so the floor keeps the true look and feel of the grain.

| SPECIES | FINISH | SURFACE | GRADES |
|---|---|---|---|
| European oak | Natural oil | Flat · Brushed · Saw | Rustic · AB |

## COLOURS



NATURA
NW-OL 101



RIVA
NW-OL 102



ALBA
NW-OL 103



NEXTWOOD
OILED OAK



BRUNO
NW-OL 104



CENERE
NW-OL 105



MOKA
NW-OL 106



NEBBIA
NW-OL 107



SIENA
NW-OL 109




NOCE
NW-OL 110



ANTICO
NW-OL 111



MIELE
NW-OL 112

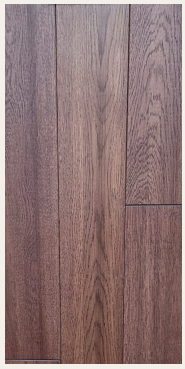

ARABICA
NW-OL 113



CARBONE
NW-OL 114

## LAYING PATTERNS · SIZES

### Plank

16 × 90 mm · 250 – 1000 mm
18 × 120 mm · 250 – 1000 mm
20 × 150 mm · 400 – 1600 mm

### Herringbone

16 × 90 · 18 × 120 mm
Blocks 500 · 600 · 700 mm

### Chevron 45°

16 × 90 · 18 × 120 mm
Both ends cut at 45°



LAYING PATTERN

# Plank

*Long boards in mixed lengths*



EUROPEAN OAK

# From the forest

*to your floor.*



LAYING PATTERN

# Herringbone

*Classic blocks, 500 · 600 · 700 mm*



LAYING PATTERN

# Chevron

*Points at 45 degrees*

# Formats & Sizes

## PLANK · MIXED LENGTH



16 × 90 mm · 250 – 1000 mm




18 × 120 mm · 250 – 1000 mm



20 × 150 mm · 400 – 1600 mm



## HERRINGBONE BLOCKS



500 mm



600 mm



700 mm


16 × 90 · 18 × 120 mm



## CHEVRON 45° BLOCKS



16 × 90 · 18 × 120 mm · 45° ends



## THE PRODUCT



**OILED OAK SURFACE**
Plant-based natural oil, matte natural feel.

**MICRO-BEVEL**
Softly eased edges for an even surface.

**TONGUE & GROOVE**
Precision profile on all sides.

**100 % SOLID OAK**
One piece through its thickness: 16 · 18 · 20 mm.



LAYING PATTERN

# Plank

*Wide, open spaces*

# Technical Data

| FORMAT | THICKNESS × WIDTH | LENGTH | SURFACE | GRADE |
|---|---|---|---|---|
| Plank · mixed length | 16 × 90 mm | 250 – 1000 mm | Flat · Brushed | Rustic · AB |
| Plank · mixed length | 18 × 120 mm | 250 – 1000 mm | Flat · Brushed | Rustic · AB |
| Plank · mixed length | 20 × 150 mm | 400 – 1600 mm | On request | On request |
| Herringbone | 16 × 90 · 18 × 120 mm | 500 · 600 · 700 mm | Flat · Brushed | Rustic · AB |
| Chevron 45° | 16 × 90 · 18 × 120 mm | On request | Flat · Brushed | Rustic · AB |
| Saw surface plank | 16 × 90 · 18 × 120 mm | 250 – 1000 mm | Saw-cut | AB |

European oak, finished with plant-based natural oil, in 13 colours. Prices and availability: see the current Nextwood price list.

CERTIFICATES

100 % Natural product

FSC® C174823

TSE · TS EN 13226

# Installation & Care

### BEFORE INSTALLATION

- Store the boxes flat in a dry room and let them acclimatise unopened for at least 48 hours.
- Keep the room at 18–24 °C and 45–60 % relative humidity.
- The subfloor must be dry, clean, level and sound. Check screed moisture before laying.

### INSTALLATION

- Full-surface bonding with a suitable parquet adhesive is recommended.
- Leave a 10 mm expansion gap at walls and fixed objects and cover it with skirting.
- Factory-oiled boards are ready to use after installation; no sanding or finishing is needed.

### CARE OF OILED FLOORS

- Clean dry with a soft brush, mop or vacuum.
- Damp-clean, never wet, with a soap made for oiled wood floors.
- Use felt pads under furniture and mats at entrances.
- Refresh with maintenance oil when the surface looks dry; repair scratches spot by spot.

# NEXTWOOD

*Crafted by nature, perfected by hand.*


BRODECOR YAPI MALZEMELERİ DIŞ TİC. LTD. ŞTİ.

www.brodecor.net · info@brodecor.net

TR +90 551 600 00 61 EN +90 546 186 20 20

FR · AR +90 545 407 60 60 IT +90 541 776 50 53

Gökevler Mah. 2312 Sok. Ginza Corner Plaza 16C Blok, 4. Kat No: 50, 34522 Esenyurt / İstanbul, Türkiye


PRODUCT CATALOGUE